TRAIL FORTRESS

BUILT FOR THE TRAIL. CHECKED FOR YOUR TRUCK.

Rough Country 1012 Installation Instructions

Front Stubby Winch Bumper for Jeep Wrangler 4WD (1987-2006)

Part number: 1012

trailfortress.com/front-stubby-winch-bumper-jeep-wrangler-4wd-rough-country-1012

Scan for fitment, price and install help

92101200A

ROUGH COUNTRY SUSPENSION SYSTEMS®

1012BAG4

TJ, YJ WINCH PLATE & BUMPER COVER

Thank you for choosing Rough Country

Please read instructions before beginning installation. Check the kit hardware against the parts list and product layout. Be sure you have all needed parts and know where they go. Also please review tools needed list and make sure you have needed tools.

If questions exist we will be happy to answer any questions concerning the design, function, and correct use of this product.

The installer must verify that the mounting kit does not interfere with the factory air bag sensors, which must not be relocated or modified in any way. The vehicles are bag system may not operate properly if the winch mounting kit is not mounted in compliance with the vehicle manufacturers recommendations.

Winch mounting should only be performed on vehicles with standard OEM bumpers.

INSTALLATION

1. Place vehicle on a flat surface and set emergency brake.
2. Remove the front valence (sway bar cover), using a 3/8” wrench. **See PHOTO 1**
3. Using a T55 torx socket, remove the front bumper mounting hardware and tow hooks if equipped.
4. Using a 15mm socket remove the front stabilizer mounting bolts. **(TJ ONLY)**
5. Place the supplied washers as shown in **PHOTO 2** on TJ models. YJ models will **not** use these washers.

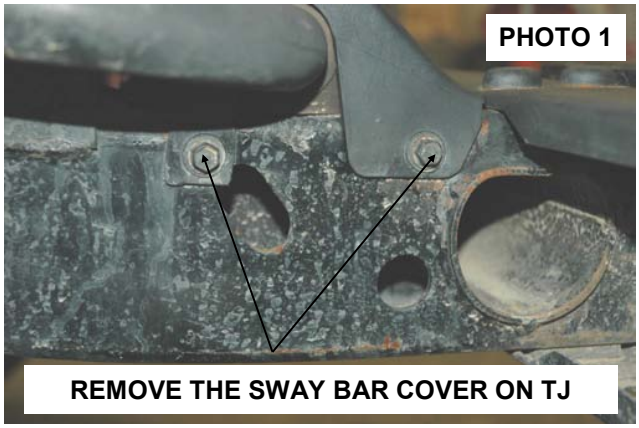


PHOTO 1

REMOVE THE SWAY BAR COVER ON TJ



PHOTO 2

PLACE WASHERS ON FRAME (TJ SHOWN)

trailfortress.com/front-stubby-winch-bumper-jeep-wrangler-4wd-rough-country-1012