TRAIL FORTRESS

BUILT FOR THE TRAIL. CHECKED FOR YOUR TRUCK.

Rough Country 10496 Installation Instructions

Replacement Grille for Jeep Wrangler 4WD (2018-2025)

Part number: 10496

trailfortress.com/replacement-grille-jeep-wrangler-gladiator-4wd-rough-country-10496

Scan for fitment, price and install help

JEEP 2019-UP JL / JT Grille

Thank you for choosing Rough Country for all your vehicle needs.

Please read instructions before beginning installation. Check the kit hardware against the kit contents shown below. Be sure you have all needed parts and know where they go.
If question exist, please call us @1-800-222-7023. We will be happy to answer any questions concerning this product.
Check all fasteners for proper torque. Check to ensure for adequate clearance between all components.
Periodically check all hardware for tightness.

KIT CONTENTS:
Grille x1
Radiator Support Mount Pass x 1
Radiator Support Mount Dr x 1

Hardware Included:
Screws x 4

TOOLS NEEDED:
Auto Trim Puller



Torque Specs:

Size	Grade 5	Grade 8	Size	Class 8.8	Class 10.9
5/16”	15 ft/lbs	20ft/lbs	6MM	5ft/lbs	9ft/lbs
3/8”	30 ft/lbs	35ft/lbs	8MM	18ft/lbs	23ft/lbs
7/16”	45 ft/lbs	60ft/lbs	10MM	32ft/lbs	45ft/lbs
1/2”	65 ft/lbs	90ft/lbs	12MM	55ft/lbs	75ft/lbs
9/16”	95 ft/lbs	130ft/lbs	14MM	85ft/lbs	120ft/lbs
5/8”	135ft/lbs	175ft/lbs	16MM	130ft/lbs	165ft/lbs
3/4”	185ft/lbs	280ft/lbs	18MM	170ft/lbs	240ft/lbs

INSTALLATION INSTRUCTONS

1. Remove the (6) push pins from the top of the grille. **See Photo 1.** Retain push pins for reuse.
2. Use a auto trim puller to remove the (6) push pins. **See Photo 2.**

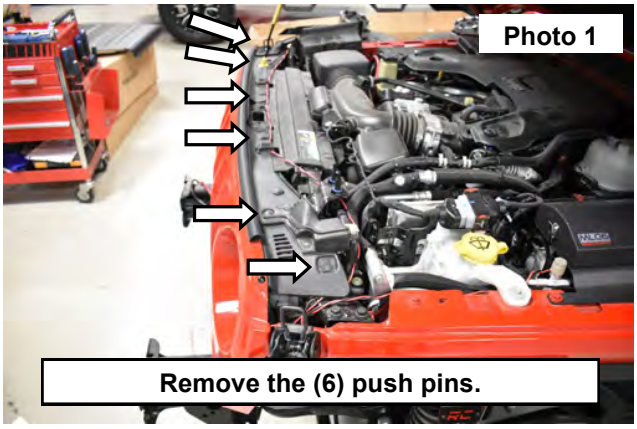

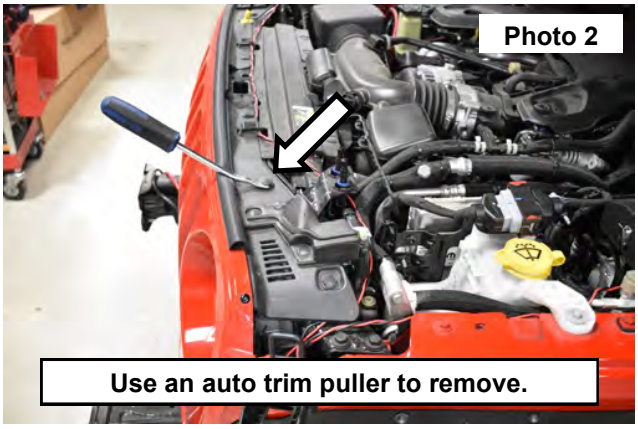

3. Lean the grille outward then release the (6) clips from the radiator support. **See Photo 3.**
4. Remove the stock grille from the vehicle.
5. Install the new grille onto the vehicle, pressing at the bottom of the grille to seat the clips into the radiator support. **See Photo 4.**





6. Install the supplied upper mounts to the grille using the supplied screws. **Do not over tighten screws**. **See Photo 5**.
7. To secure the upper grille flange to the radiator support, install the (6) retained push pins into the top of the grille.
8. Lower the hood and latch. **See Photo 6.**

