TRAIL FORTRESS

BUILT FOR THE TRAIL. CHECKED FOR YOUR TRUCK.

Rough Country 70086 Installation Instructions

40-Inch Black Series Curved LED Light Bar Roof Kit for Jeep Cherokee

Part number: 70086

trailfortress.com/rough-country-led-light-kit-70086

Scan for fitment, price and install help

921700850

JEEP KL LIGHT BAR MOUNT

Thank you for choosing Rough Country for all your vehicle needs.

Please read instructions before beginning installation. Check the kit hardware against the kit contents shown below. Be sure you have all needed parts and know where they go.
If question exist, please call us @1-800-222-7023. We will be happy to answer any questions concerning this product.
Check all fasteners for proper torque. Check to ensure for adequate clearance between all components.
Periodically check all hardware for tightness.

KIT CONTENTS:
Dr. Side Bracket
Pass. Side Bracket

TOOLS REQUIRED:
Flat Pry Tool
T30 Torx




Torque Specs:


Size	Grade 5	Grade 8	Size	Class 8.8	Class 10.9
5/16”	15 ft/lbs	20ft/lbs	6MM	5ft/lbs	9ft/lbs
3/8”	30 ft/lbs	35ft/lbs	8MM	18ft/lbs	23ft/lbs
7/16”	45 ft/lbs	60ft/lbs	10MM	32ft/lbs	45ft/lbs
1/2”	65 ft/lbs	90ft/lbs	12MM	55ft/lbs	75ft/lbs
9/16”	95 ft/lbs	130ft/lbs	14MM	85ft/lbs	120ft/lbs
5/8”	135ft/lbs	175ft/lbs	16MM	130ft/lbs	165ft/lbs
3/4”	185ft/lbs	280ft/lbs	18MM	170ft/lbs	240ft/lbs

INSTALLATION INSTRUCTONS

1. Use a flat pry tool to remove the caps on the roof rack. Each rail will have two caps. See Photo 1.
2. Use a T30 torx to remove the bolts securing the roof rack to the vehicle body. Retain hardware for reuse. See Photo 2.

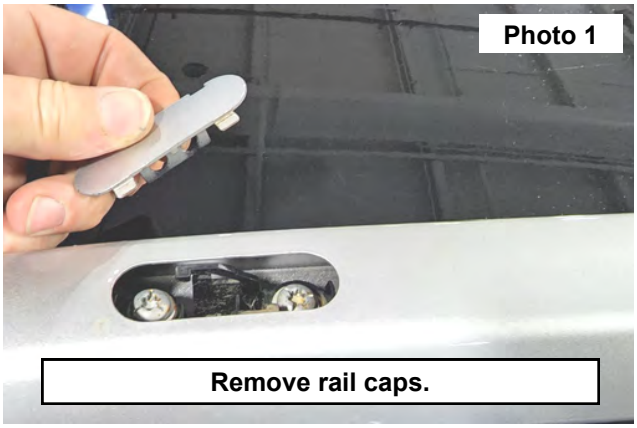


Remove rail caps.

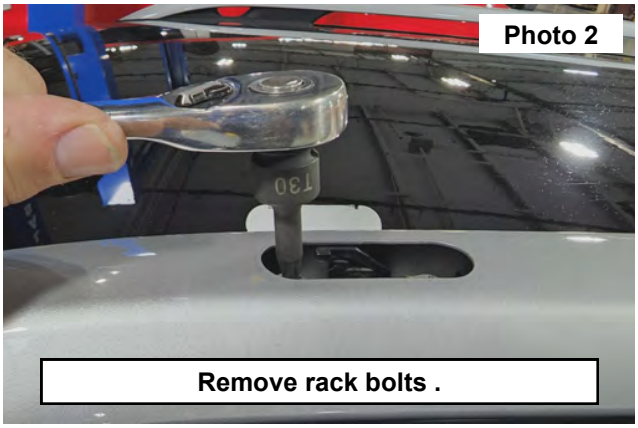


Remove rack bolts .

3. Pull the rail off the vehicle and set aside. See Photo 3.
4. Place the driver side bracket keyhole onto the frontmost mounting insert. Push the bracket to the rear of the vehicle to secure the bracket in the slot. See Photo 4.
5. Repeat for other side.
6. Mount the light bar to the bracket following the instructions included with the light bar.
7. Once light bar installation is finished, reinstall the roof rack rails using the factory hardware. Tighten with a T30 torx.
8. Reinstall roof rack rail caps.

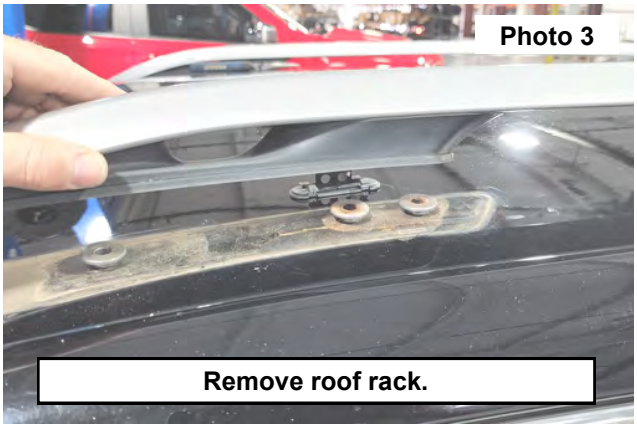

Remove roof rack.

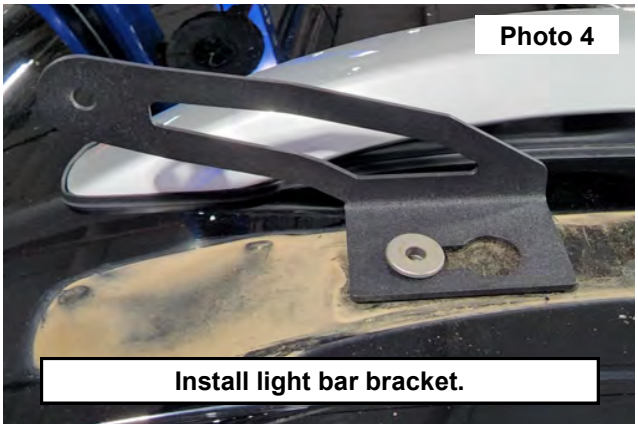

Install light bar bracket.



Driver Bracket.



Passenger Bracket.

By purchasing any item sold by Rough Country, LLC, the buyer expressly warrants that he/she is in compliance with all applicable, State, and Local laws and regulations regarding the purchase, ownership, and use of the item. It shall be the buyers responsibility to comply with all Federal, State and Local laws governing the sales of any items listed, illustrated or sold. The buyer expressly agrees to indemnify and hold harmless Rough Country, LLC for all claims resulting directly or indirectly from the purchase, ownership, or use of the items.