TRAIL FORTRESS

BUILT FOR THE TRAIL. CHECKED FOR YOUR TRUCK.

Rough Country 91028 Installation Instructions

4-Layer Neoprene Seat Covers: Bucket Front, Crew Cab Rear

Part number: 91028

trailfortress.com/rough-country-seat-covers-91028

Scan for fitment, price and install help

929102800

ROUGH COUNTRY
SUSPENSION SYSTEMS®

RAM 2014-18 1500 FR BUCKET SEAT COVER KIT

Thank you for choosing Rough Country for all your vehicle needs.


Please read instructions before beginning installation. Check the kit hardware against the kit contents shown below. Be sure you have all needed parts and know where they go.


If question exist, please call us @1-800-222-7023. We will be happy to answer any questions concerning this product.



INSTALLATION INSTRUCTONS

1. Seats were removed for photo purposes. This is not necessary but can be removed for installation.
2. If you are not removing the seats skip to ***Step 6***.
3. If you have chosen to remove the front seats remove the bolt in the seat frame using a 15mm in the front and an 18mm socket for the rear bolts. **See Photo 1 and 2 .** Retain hardware for later use.

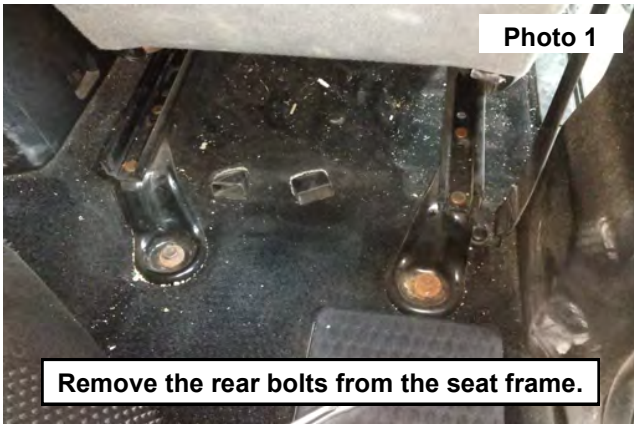

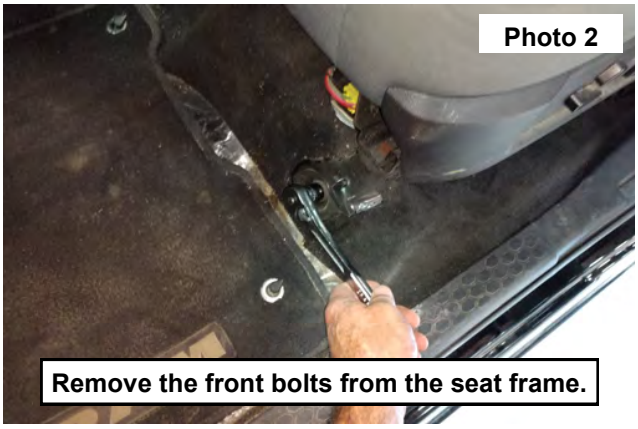


4. Disconnect the seats wiring harness under the seat. **See Photo 3.**
5. Remove the seat.
6. Installing the seat cover. Remove the headrest from the seat by pressing the button on the side of the adjustment tabs. Pull straight out of the top of the seat then set aside in a safe place for later use. **See Photo 4.**







7. Place the seat cover onto the seat from the top down. The outside of the cover will have an air bag cut out. **See Photo 5.**
8. Tuck the seat cover tab inside of the back rest and bottom of the seat. **See Photo 6.**



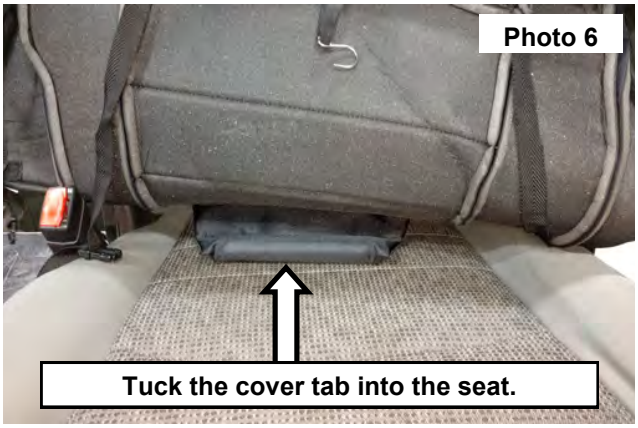

9. Wrap the straps around the bottom and front sides of the seat then connect the buckle together. Pull the strap tight securing the cover to the seat. **See Photo 7.**
10. Pull the hooked straps tight and connecting them to the frame on each side of the seat. **See Photo 8.**

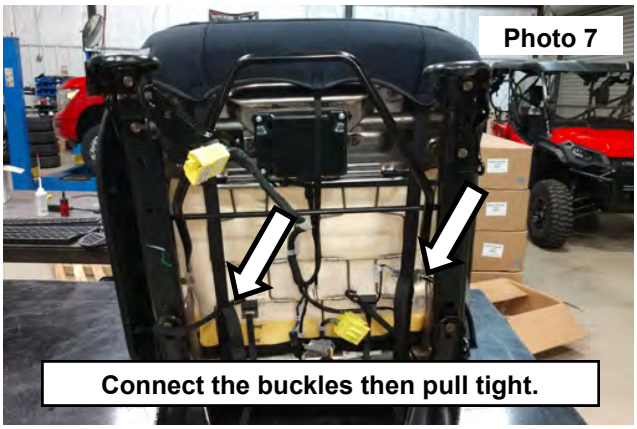

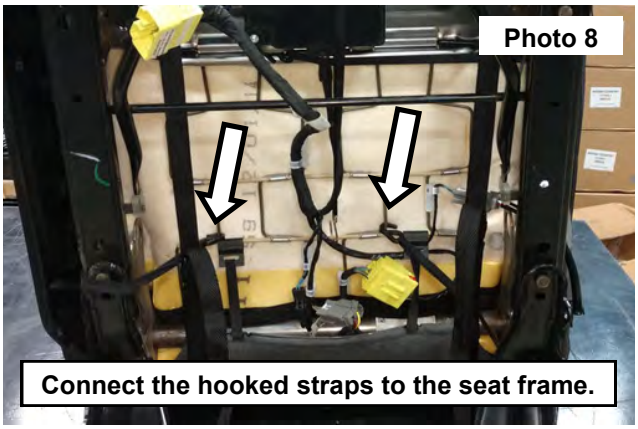

11. Tuck the seat cover under the head rest mount on top of the seat. **See Photo 9.**
12. Slide the head rest into the cover and secure tight using the Velcro on the bottom at the bottom of the cover. **See Photo 10.**





13. Install the head rest into the mounting location of the seat. **See Photo 11.**
14. Install the cover onto the opposite seat and Install the front seats if they were removed for the installation process at this time.



By purchasing any item sold by Rough Country, LLC, the buyer expressly warrants that he/she is in compliance with all applicable, State, and Local laws and regulations regarding the purchase, ownership, and use of the item. It shall be the buyers responsibility to comply with all Federal, State and Local laws governing the sales of any items listed, illustrated or sold. The buyer expressly agrees to indemnify and hold harmless Rough Country, LLC for all claims resulting directly or indirectly from the purchase, ownership, or use of the items.