# Rough Country 10539 Installation Instructions

10539

Part number: 10539

trailfortress.com/rough-country-fender-delete-kit-10539

Scan for fitment, price and install help

ROUGH COUNTRY SUSPENSION SYSTEMS®

921105390

# JEEP 2018 JL Fender Flare Delete

**Thank you for choosing Rough Country for all your vehicle needs.**

Please read instructions before beginning installation. Check the kit hardware against the kit contents shown below. Be sure you have all needed parts and know where they go.
If question exist, please call us @1-800-222-7023. We will be happy to answer any questions concerning this product.
Check all fasteners for proper torque. Check to ensure for adequate clearance between all components.
Periodically check all hardware for tightness.

**KIT CONTENTS:**
**1-Drivers Side Front Fender Delete**
**1-Passengers Side Front Fender Delete**
**1-Drivers Side Rear Fender Delete**
**1-Passengers Side Rear Fender Delete**
**2-3/4" Blink/Park Light**
**2-Light Gromet**
**2-Blinker Light Resistor**
**2-RC Logo Plates**

**HARDWARE INCLUDED:**
**1-6mm-1.0 x 40mm Hex Head Bolt**
**1-5/16-18 Hex Nut**
**12-6mm Nut Inserts**
**24-6mm-1.0 x 20mm Button Head Bolts**
**12-6mm-1.0 Nylock Nut**
**36-6mm Flat Washer**
**22-8mm-1.25 x 25mm Button Head Bolt**
**22-8mm Flat Washer**
**22-8mm-1.25 Nylock Flange Nut**
**4-Wire Ties**
**6-24-22 Ga. Butt Connectors**

**TOOLS NEEDED:**
**4mm Allen**
**5mm Allen**
**8mm Socket**
**10mm Socket**
**13mm Wrench**
**Auto Trim Puller**
**Long Nose Plyers**
**Wire Cutters**
**Butt Connector Crimpers**
**Cut Off Wheel**
**Floor Jack**
**Jack Stands**
**"W" or a 25/64 Drill Bit**
**3/8 Drill Bit**
**Drill Motor**
**Wheel Chocks**
**Wire Solder**
**Heat Shrink or Weather Proof Tape**
**1 Foot 24-22 Ga. wire**

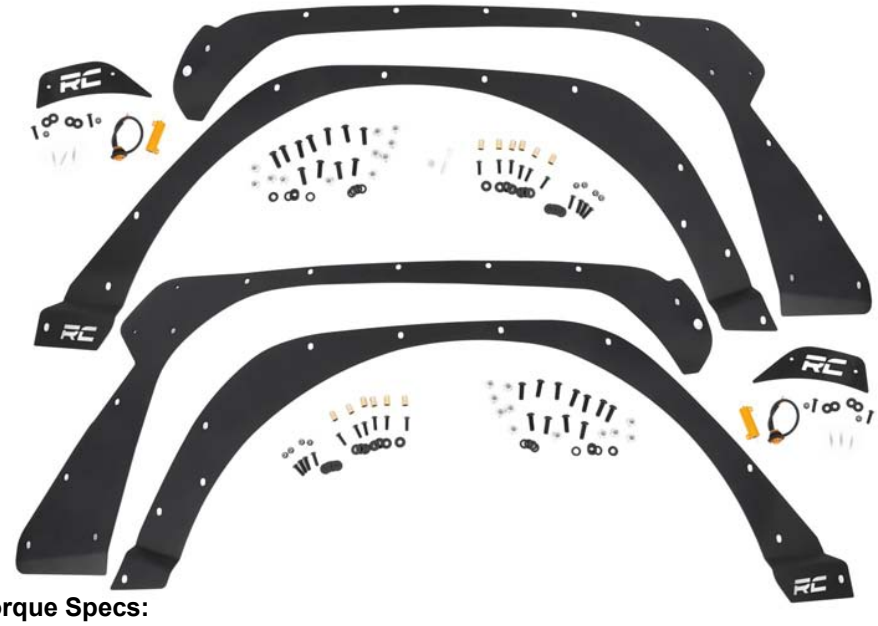

**Torque Specs:**

| Size | Grade 5 | Grade 8 | Size | Class 8.8 | Class 10.9 |
|---|---|---|---|---|---|
| 5/16" | 15 ft/lbs | 20ft/lbs | 6MM | 5ft/lbs | 9ft/lbs |
| 3/8" | 30 ft/lbs | 35ft/lbs | 8MM | 18ft/lbs | 23ft/lbs |
| 7/16" | 45 ft/lbs | 60ft/lbs | 10MM | 32ft/lbs | 45ft/lbs |
| 1/2" | 65 ft/lbs | 90ft/lbs | 12MM | 55ft/lbs | 75ft/lbs |
| 9/16" | 95 ft/lbs | 130ft/lbs | 14MM | 85ft/lbs | 120ft/lbs |
| 5/8" | 135ft/lbs | 175ft/lbs | 16MM | 130ft/lbs | 165ft/lbs |
| 3/4" | 185ft/lbs | 280ft/lbs | 18MM | 170ft/lbs | 240ft/lbs |